

**GSFC JPSS CMO**  
**April 10, 2017**  
**Released**

**Joint Polar Satellite System (JPSS) Ground Project**  
**Code 474**  
**474-00064**

**Joint Polar Satellite System (JPSS)**  
**Operational Algorithm Description**  
**(OAD)**  
**Document for VIIRS Active Fires**  
**(AF) Environmental Data Record**  
**(EDR) Software**

**For Public Release**

The information provided herein does not contain technical data as defined in the International Traffic in Arms Regulations (ITAR) 22 CFC 120.10. This document has been approved For Public Release to the NOAA Comprehensive Large Array-data Stewardship System (CLASS).



**Goddard Space Flight Center**  
**Greenbelt, Maryland**

National Aeronautics and  
Space Administration

**Joint Polar Satellite System (JPSS)  
Operational Algorithm Description (OAD) Document for  
VIIRS Active Fires (AF) Environmental Data Record (EDR)  
Software  
JPSS Electronic Signature Page**

**Prepared By:**

Ray Godin  
JPSS Data Products and Algorithms EDR Lead  
(Electronic Approvals available online at ([https://jpssmis.gsfc.nasa.gov/mainmenu\\_dsp.cfm](https://jpssmis.gsfc.nasa.gov/mainmenu_dsp.cfm)))

**Approved By:**

Gilberto Vicente  
JPSS Ground Project Algorithm Integration Team (AIT) Manager  
(Electronic Approvals available online at ([https://jpssmis.gsfc.nasa.gov/mainmenu\\_dsp.cfm](https://jpssmis.gsfc.nasa.gov/mainmenu_dsp.cfm)))

**Goddard Space Flight Center  
Greenbelt, Maryland**

## Preface

This document is under JPSS Ground Algorithm ERB configuration control. Once this document is approved, JPSS approved changes are handled in accordance with Class I and Class II change control requirements as described in the JPSS Configuration Management Procedures, and changes to this document shall be made by complete revision.

Any questions should be addressed to:

JPSS Configuration Management Office  
NASA/GSFC  
Code 474  
Greenbelt, MD 20771

## Change History Log

Revision	Effective Date	Description of Changes (Reference the CCR & CCB/ERB Approve Date)
Original	05/20/11	<b>474-CCR-11-0080:</b> This version baselines D36981, Operational Algorithm Description Document for VIIRS Active Fires Application Related Product (ARP), Rev B, dated 05/19/2010, as a JPSS document version Rev -. This is the version that was approved for NPP launch. Per NPOESS CDFCB - External, Volume V – Metadata, doc number D34862-05, this has been approved for Public Release into CLASS. This CCR was approved by the JPSS Algorithm ERB on May 20, 2011.
Revision A	01/18/2012	<b>474-CCR-11-0270:</b> This version baselines 474-00064, Joint Polar Satellite System (JPSS) Operational Algorithm Description (OAD) Document for VIIRS Active Fires (AF) Application Related Product (ARP) Software, for the Mx 6 IDPS release. This CCR was approved by the JPSS Algorithm ERB on January 18, 2012.
Revision B	05/14/2013	<b>474-CCR-13-0948:</b> This version authorizes 474-00064, JPSS OAD Document for VIIRS AF ARP Software, for the Mx 7.0 IDPS release. Includes Raytheon PCR032720; 474-CCR-13-0916/ECR-ALG-0037: Update applicable OAD filenames/template/Rev/etc. for Mx7 Release.
Revision C	03/13/2017	<b>474-CCR-17-3243 (ECR-CGS-0714):</b> This version authorizes 474-00064, JPSS OAD Document for VIIRS AF EDR Software, for the Block 2.0 IDPS release. Includes: <ol style="list-style-type: none"> <li>1). Raytheon PCR045592: SRS UPPER: 474-CCR-15-2643: Update AF ARP OAD with changes related to 474-CCR-13-1408, in numerous sections. OAD Title changes to Active Fires EDR and all references to “ARP” were replaced with “EDR”.</li> <li>2). Raytheon PCR045678: Block 2.0: PRO: OAD: CCR: 474-CCR-15-2444: General OAD Clean-up CCR/PCR, affects all 35/37 OADs. All sections and tables may be affected.</li> </ol>



**NATIONAL POLAR-ORBITING  
OPERATIONAL ENVIRONMENTAL  
SATELLITE SYSTEM (NPOESS)**

**OPERATIONAL ALGORITHM DESCRIPTION  
DOCUMENT FOR VIIRS ACTIVE FIRES  
APPLICATION RELATED PRODUCT (ARP)**

**SDRL No. S141  
SYSTEM SPECIFICATION SS22-0096**

**RAYTHEON COMPANY  
INTELLIGENCE AND INFORMATION SYSTEMS (IIS)  
NPOESS PROGRAM  
OMAHA, NEBRASKA**

**Copyright © 2003-2010  
Raytheon Company  
Unpublished Work  
ALL RIGHTS RESERVED**

Portions of this work are the copyrighted work of Raytheon. However, other entities may own copyrights in this work. Therefore, the recipient should not imply that Raytheon is the only copyright owner in this work.

This data was developed pursuant to Contract Number F04701-02-C-0502 with the US Government under subcontract number 7600002744. The US Government's right in and to this copyrighted data are as specified in DFAR 252.227-7013, which was made part of the above contract.

IAW DFAR 252.227-7036, Raytheon hereby declares that, to the best of its knowledge and belief, the technical data delivered under Subcontract No. 7600002744 is complete, accurate, and complies with all requirements of the Subcontract.

TITLE: NATIONAL POLAR-ORBITING OPERATIONAL ENVIRONMENTAL SATELLITE SYSTEM (NPOESS) OPERATIONAL ALGORITHM DESCRIPTION DOCUMENT FOR ACTIVE FIRES APPLICATION RELATED PRODUCT (ARP)

APPROVAL SIGNATURES:



19 May 2010

---

Stephen E. Ellefson  
ING/PRO Lead

Date



19 May 2010

---

Gabriela A. Ostler  
Mission Assurance and Enterprise Effectiveness (MAEE)

Date

Northrop Grumman Space & Mission Systems Corp.  
**Space Technology**  
One Space Park  
Redondo Beach, CA 90278



**Engineering & Manufacturing Development (EMD) Phase  
Acquisition & Operations Contract**

**CAGE NO. 11982**

<b>Operational Algorithm Description Document for VIIRS Active Fires Application Related Product (ARP)</b>	
<b>Document Date: Oct 11, 2010</b>	<b>Document Number: D36981 Revision: C3</b>

**PREPARED BY:**

Dr. Alain Sei <span style="float: right;"><i>Date</i></span> <i>AM&amp;S VFM IP Lead</i>	<span style="float: right;">19 May 2010</span> Paul D. Siebels <span style="float: right;"><i>Date</i></span> <i>IDPS PRO SW Manager</i>
---	--

**ELECTRONIC APPROVAL SIGNATURES:**

Roy Tsugawa <span style="float: right;"><i>Date</i></span> <i>A&amp;DP Lead &amp; ACCB Chair</i>	<span style="float: right;">19 May 2010</span> Stephen E. Ellefson <span style="float: right;"><i>Date</i></span> <i>IDPS Processing SI Lead</i>
Bob Hughes <span style="float: right;"><i>Date</i></span> <i>A&amp;DP Deputy &amp; ARB Chair</i>	

Prepared by  
**Northrop Grumman Space Technology**  
One Space Park  
Redondo Beach, CA 90278

Prepared for  
**Department of the Air Force**  
NPOESS Integrated Program Office  
C/O SMC/CIK  
2420 Vela Way, Suite 1467-A8  
Los Angeles AFB, CA 90245-4659

Under  
**Contract No. F04701-02-C-0502**

This document has been identified per the NPOESS Common Data Format Control Book – External Volume 5 Metadata, D34862-05, Appendix B as a document to be provided to the NOAA Comprehensive Large Array-data Stewardship System (CLASS) via the delivery of NPOESS Document Release Packages to CLASS.

Northrop Grumman Space & Mission Systems Corp. <b>Space Technology</b> One Space Park Redondo Beach, CA 90278		  	
<b>Revision/Change Record</b>			Document Number <b>D36981</b>
Revision	Document Date	Revision/Change Description	Pages Affected
---	9-30-03	Initial Release.	All
A1	12-10-03	Changes to algorithm as a result of integrating into IPO model for IDPS.	All
A2	6-16-05	Reflects Science To Operational Code Conversion.	All
A3	9-25-06	Corrected Document ID number from D36981-IDP-001 to D36981 as directed by NGST DM.	All
A4	10-30-06	Updated grammar, etc for EDP Code PR.	All
A5	6-15-07	Logo, cleanup updates. Delivered to NGST.	All
A6	9-15-08	Reformatted to conform to template D41851. Updated graceful degradation and data quality monitoring sections. New cover sheet, update references, acronym list, prepare for peer review. Delivered to NGST.	All
A7	10-1-08	Added terrain corrected text to Geolocation input in Table 3. Prepared for TIM/ACCB.	All
A	10-29-08	ECR A-173. Incorporated interim changes and addressed TIM/ACCB comments.	All
B1	06-17-09	Added D48316_---_CmnAdjacency_OAD to the reference Table.	2
B2	12-01-09	Updated for RFA No. 549, updated subcontract number	All
B	5-19-2010	Prepared for TIM/ARB/ACCB	All
C1	8-16-10	Updated Table 2 due to an omission	Table 2
C2	9-16-10	Updated due to document convergence (TM 2010.510.0075)	All
C3	10-11-10	Updated due to document convergence action items and general clean-up.	All

**Table of Contents**

1.0 INTRODUCTION..... 1

    1.1 Objective..... 1

    1.2 Scope ..... 1

    1.3 References ..... 1

        1.3.1 Document References ..... 1

        1.3.2 Source Code References ..... 2

2.0 ALGORITHM OVERVIEW ..... 3

    2.1 Active Fires Environmental Data Record (EDR) Description..... 3

        2.1.1 Interfaces ..... 3

            2.1.1.1 Inputs ..... 4

            2.1.1.2 Outputs ..... 5

                2.1.1.2.1 VIIRS Active Fires EDR..... 5

                2.1.1.2.2 VIIRS Fire Mask (Heap Data Item)..... 5

        2.1.2 Algorithm Processing ..... 6

            2.1.2.1 Main Module - ProEdrViirsActiveFires.cpp..... 6

            2.1.2.2 ProEdrViirsActiveFires::detect(...) ..... 6

            2.1.2.3 ProEdrViirsActiveFires::prescreen(...) ..... 7

            2.1.2.4 ProEdrViirsActiveFires::bkgPixels(...)..... 7

            2.1.2.5 ProEdrViirsActiveFires::getValidBkgPixels(...) ..... 8

            2.1.2.6 ProEdrViirsActiveFires::countAdjacentPixels(...)..... 8

            2.1.2.7 ProEdrViirsActiveFires::computeStats(...) ..... 9

            2.1.2.8 ProEdrViirsActiveFires::sunGlint(...)..... 9

            2.1.2.9 ProEdrViirsActiveFires::fixang(...)..... 9

            2.1.2.10 ProEdrViirsActiveFires::confidence(...)..... 9

            2.1.2.11 ProEdrViirsActiveFires::S(...)..... 10

            2.1.2.12 ProEdrViirsActiveFires::computeNDVI(...)..... 10

            2.1.2.13 ProEdrViirsActiveFires::bkgWaterPix(...)..... 10

            2.1.2.14 ProEdrViirsActiveFires::iscloud(...)..... 10

        2.1.3 Graceful Degradation..... 10

            2.1.3.1 Graceful Degradation Inputs ..... 10

            2.1.3.2 Graceful Degradation Processing ..... 11

            2.1.3.3 Graceful Degradation Outputs ..... 11

        2.1.4 Exception Handling ..... 11

        2.1.5 Data Quality Monitoring ..... 11

2.1.6 Computational Precision Requirements ..... 11

2.1.7 Algorithm Support Considerations ..... 11

2.1.8 Assumptions and Limitations ..... 11

    2.1.8.1 Assumptions ..... 11

    2.1.8.2 Limitations ..... 12

3.0 GLOSSARY/ACRONYM LIST ..... 13

    3.1 Glossary ..... 13

    3.2 Acronyms ..... 16

4.0 OPEN ISSUES ..... 17

**List of Figures**

Figure 1. Processing Chain Associated with VIIRS Active Fires EDR..... 3  
Figure 2. IPO Model Interface to INF and DMS ..... 4

**List of Tables**

Table 1. Reference Documents ..... 1  
Table 2. Source Code References..... 2  
Table 3. VIIRS Active Fires Inputs ..... 4  
Table 4. VIIRS Fire Mask Heap Output Content..... 5  
Table 5. Graceful Degradation..... 11  
Table 6. Glossary ..... 13  
Table 7. Acronyms ..... 16  
Table 8. TBXs ..... 17

## 1.0 INTRODUCTION

### 1.1 Objective

The purpose of the Operational Algorithm Description (OAD) document is to express, in computer-science terms, the remote sensing algorithms that produce the Joint Polar Satellite System (JPSS) end-user data products. These products are individually known as Raw Data Records (RDRs), Temperature Data Records (TDRs), Sensor Data Records (SDRs) and Environmental Data Records (EDRs). In addition, any Intermediate Products (IPs) produced in the process are also described in the OAD.

The science basis of an algorithm is described in a corresponding Algorithm Theoretical Basis Document (ATBD). The OAD provides a software description of that science as implemented in the operational ground system.

The purpose of an OAD is two-fold:

1. Provide initial implementation design guidance to the operational software developer.
2. Capture the “as-built” operational implementation of the algorithm reflecting any changes needed to meet operational performance/design requirements.

An individual OAD document describes one or more algorithms used in the production of one or more data products. There is a general, but not strict, one-to-one correspondence between OAD and ATBD documents.

### 1.2 Scope

The scope of this document is limited to describing the operational algorithm implementation required to create the VIIRS Active Fires Environmental Data Record (EDR). It provides a general overview and is intended to supplement in-line software documentation and interface control documentation for maintenance of the operational software.

The scope of this document is limited to the description of the core operational algorithm(s) required to create the VIIRS Active Fires EDR. The theoretical basis for this algorithm is described in Section 3 of VIIRS Active Fires: Fire Mask Algorithm Theoretical Basis Document (ATBD), D0001-M01-S01-021.

### 1.3 References

#### 1.3.1 Document References

The science and system engineering documents relevant to the algorithms described in this OAD are listed in Table 1.

**Table 1. Reference Documents**

Document Title	Document Number/Revision	Revision Date
VIIRS Active Fires: Fire Mask Algorithm Theoretical Basis Document (ATBD)	D0001-M01-S01-021	Latest
Joint Polar Satellite System (JPSS) Algorithm Specification Part 10	474-00448-01-10_JPSS-SRS-Vol-I-Part-10	Latest

Document Title	Document Number/Revision	Revision Date
	474-00448-02-10_JPSS-DD-Vol-II-Part-10 474-00448-03-10_JPSS-OAD-Vol-III-Part-10 474-00448-04-10_JPSS-SRSPF-Vol-IV-Part-10	
Joint Polar Satellite System (JPSS) Algorithm Specification Part 06	474-00448-02-06_JPSS-DD-Vol-II-Part-06	Latest
Joint Polar Satellite System (JPSS) Algorithm Specification Part 07	474-00448-02-07_JPSS-DD-Vol-II-Part-07	Latest
Joint Polar Satellite System (JPSS) Program Lexicon	470-00041	Latest
NGST/SE technical memo – VCM_vs_VFM_Memo	NP-EMD.2004.510.0061	20 Dec 2004
Operational Algorithm Description Document for Common Adjacency	474-00097	Latest
NGST/SE technical memo – Correction_of_Reflectance_Normalization_and_Brightness_Temperature_Ingest_for_Active_Fire_CM_vs_VFM_Memo	NP-EMD.2009.510.0070	03 Dec 2009
NGST/SE technical memo – OAD updates for Active Fires	NP-EMD-2010.510.0075	16 Sep 2010

### 1.3.2 Source Code References


The science and operational code and associated documentation relevant to the algorithms described in this OAD are listed in Table 2.

**Table 2. Source Code References**

Reference Title	Reference Tag/Revision	Revision Date
VIIRS Fire Mask science-grade software (initial drop)	NGST_2_3	30 Sep 2003
Fire Mask Operational Software	Build 1.3 (OAD Rev A2)	10 Dec 2003
Fire Mask Operational Software	Build 1.5 Follow-on (OAD Rev A5)	15 Jun 2007
ACCB (No code updates)	OAD Rev A (ECR A-173)	29 Oct 2008
RFA Update (No Code updates)	OAD Rev B2	01 Dec 2009
NGST/SE technical memo – Correction_of_Reflectance_Normalization_and_Brightness_Temperature_Ingest_for_Active_Fire_CM_vs_VFM_Memo [IDPS PCR22167: This PCR was not implemented in the operational baseline—it documented a change to the NG science baseline only]	NP-EMD.2009.510.0070 (no operational code or OAD updates)	N/A
Active Fires Science-grade software	ISTN_VIIRS_NGST_4.22	30 Mar 2010
Active Fires Operation Software	Sensor Characterization Build SC-9 (OAD Rev B)	17 Mar 2010
ACCB (No Code Updates)	OAD Rev B	19 May 2010
Convergence Updates (No code updates) PCR024721	OAD Rev C3	11 Oct 2010
OAD transitioned to JPSS Program – this table is no longer updated.		

## 2.0 ALGORITHM OVERVIEW

This document provides the operational algorithm description for the Fire Mask Unit of the VIIRS Active Fires algorithms, which produces the VIIRS Active Fires Environmental Data Record (EDR). The Active Fires EDR, based upon the MODIS Fire Mask Version 4 code, produces a fire/ no fire mask from Visible and Infrared Imaging Radiometer Suite (VIIRS) data. The VIIRS Active Fires EDR described here provides the latitude and longitude and quality information of pixels containing active fires. The VIIRS Active Fires EDR is computed after the RDR and SDR processing is complete. The processing relationship is illustrated in Figure 1 below.

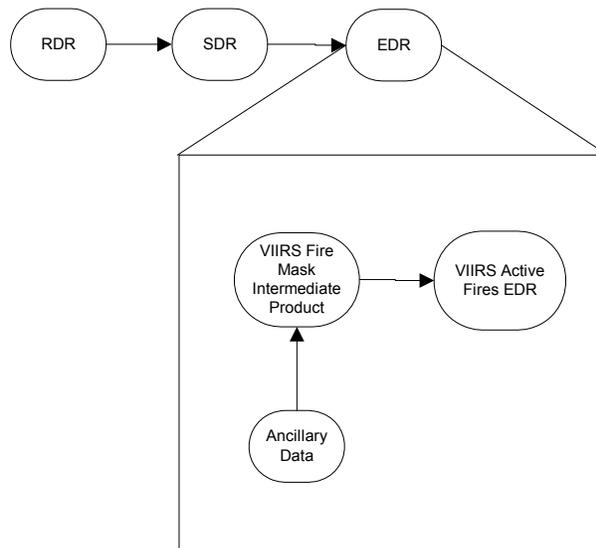

**Figure 1. Processing Chain Associated with VIIRS Active Fires EDR**

### 2.1 Active Fires Environmental Data Record (EDR) Description

#### 2.1.1 Interfaces

The Active Fires EDR is part of the Masks Controller process that is initiated by the Infrastructure (INF) Software Item (SI) to begin processing the data. The INF SI provides tasking information to the algorithm indicating which granule will be processed. The Data Management (DMS) SI provides data storage and retrieval capability. The interface to these SIs is implemented by a library of C++ classes. The interfaces to these other SIs are shown in Figure 2.

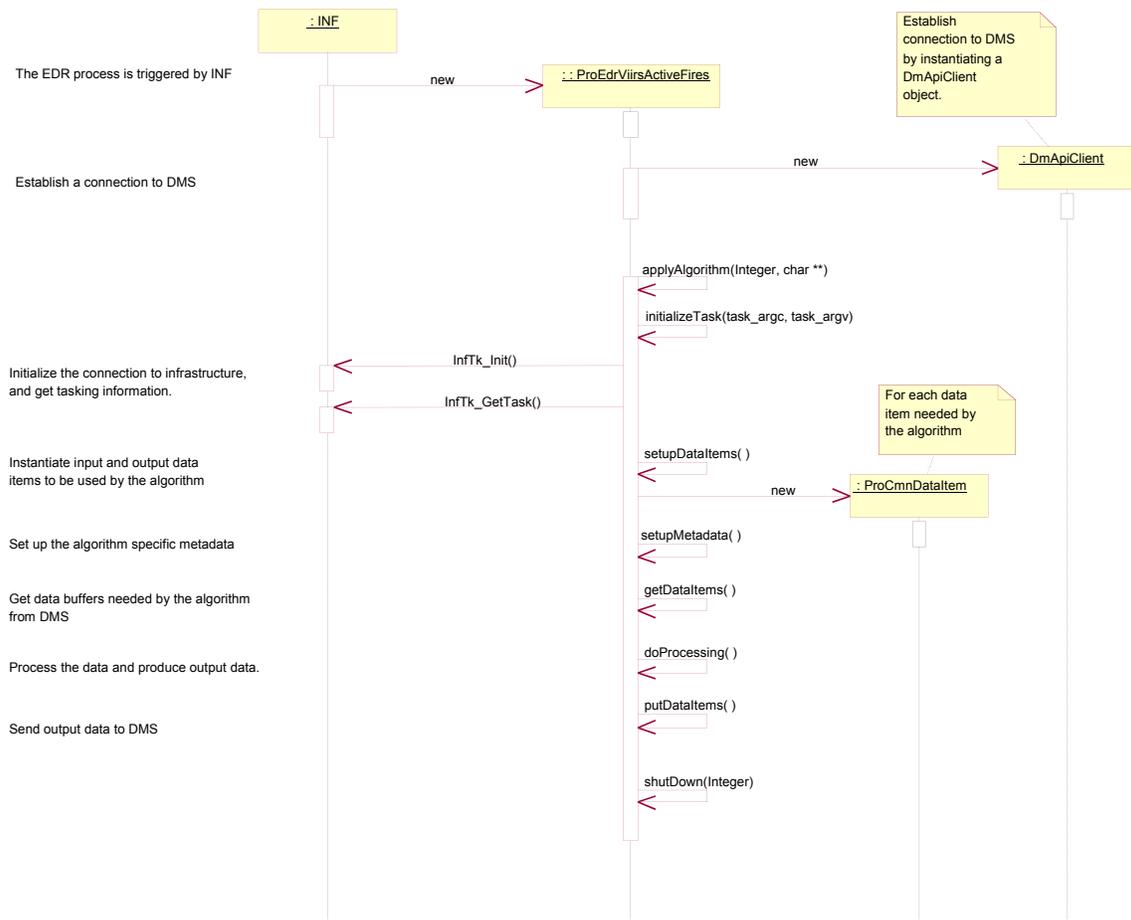


Figure 2. IPO Model Interface to INF and DMS

2.1.1.1 Inputs

The Active Fires algorithm requires several types of input data to compute the Active Fires EDR and Fire Mask (heap item); they are summarized in 474-00448-01-10\_JPSS-SRS-Vol-I-Part-10. See Table 3 below for the details [JG1].

Table 3. VIIRS Active Fires [DAR2]Inputs

Input	Description	Reference Document
VIIRS M5 SDR Reflectance	VIIRS Calibrated Top of the atmosphere (TOA) Reflectances	474-00448-02-06_JPSS-DD-Vol-II-Part-06
VIIRS M7 SDR Reflectance	VIIRS Calibrated Top of the atmosphere (TOA) Reflectances	474-00448-02-06_JPSS-DD-Vol-II-Part-06
VIIRS M11 SDR Reflectance	VIIRS Calibrated Top of the atmosphere (TOA) Reflectances	474-00448-02-06_JPSS-DD-Vol-II-Part-06
VIIRS M13 SDR Brightness Temperature	VIIRS Top of the atmosphere (TOA) brightness temperatures	474-00448-02-06_JPSS-DD-Vol-II-Part-06
VIIRS M15 SDR Brightness Temperature	VIIRS Top of the atmosphere (TOA) brightness temperatures	474-00448-02-06_JPSS-DD-Vol-II-Part-06
VIIRS M16 SDR Brightness Temperature	VIIRS Top of the atmosphere (TOA) brightness temperatures	474-00448-02-06_JPSS-DD-Vol-II-Part-06

Input	Description	Reference Document
VIIRS Mod terrain corrected Geolocation Latitude	Latitude of each pixel (positive North)	474-00448-02-06_JPSS-DD-Vol-II-Part-06
VIIRS Mod terrain corrected Geolocation Longitude	Longitude of each pixel (positive East)	474-00448-02-06_JPSS-DD-Vol-II-Part-06
VIIRS Mod terrain corrected Geolocation satAzimuth	Azimuth angle (measured clockwise positive from North) to Satellite at each pixel position	474-00448-02-06_JPSS-DD-Vol-II-Part-06
VIIRS Mod terrain corrected Geolocation satZenith	Zenith angle to Satellite at each pixel position	474-00448-02-06_JPSS-DD-Vol-II-Part-06
VIIRS Mod terrain corrected Geolocation sunAzimuth	Azimuth angle of sun (measured clockwise positive from North) at each pixel position	474-00448-02-06_JPSS-DD-Vol-II-Part-06
VIIRS Mod terrain corrected Geolocation sunZenith	Zenith angle of sun at each pixel position	474-00448-02-06_JPSS-DD-Vol-II-Part-06
VIIRS Gip QstLwmGran Qstlwm	Combined quarterly surface type	474-00448-02-07_JPSS-DD-Vol-II-Part-07[SPM3]
VIIRS Active fires EDR Ephemeral PC	LUT providing thresholds for the algorithm	474-00448-02-10_JPSS-DD-Vol-II-Part-10

### 2.1.1.2 Outputs

#### 2.1.1.2.1 VIIRS Active Fires EDR

The VIIRS Active Fires EDR produces output fields described in 474-00448-02-10\_JPSS-DD-Vol-II-Part-10, Section 5.1.1. The output is in the form of a vector for each pixel that Fire is detected.

#### 2.1.1.2.2 VIIRS Fire Mask (Heap Data Item)

The VIIRS Fire Mask produces the Fire Mask output as a heap data item which is internal to the algorithm. The fields are described in Table 4. The enumerated outputs in the Fire Mask are CLASS\_NOPROC\_MISS, CLASS\_NOPROC\_SCAN, CLASS\_NOPROC\_OTHER, CLASS\_WATER, CLASS\_CLOUD, CLASS\_NO\_FIRE, CLASS\_UNKNOWN, CLASS\_FIRE\_LOW, CLASS\_FIRE\_MED, and CLASS\_FIRE\_HIGH. The quality assurance bitmap records information regarding the success/failure of the various fire tests; its structure is described in 474-00448-02-10\_JPSS-DD-Vol-II-Part-10, Section 5.1.2.

**Table 4. VIIRS Fire Mask Heap Output Content**

Output	Description
Fire Mask	Enumerated values representing the fire classification of each pixel in the granule

Output	Description	
qcFlags	Quality Assurance bitmap with test information for each pixel in the granule:	
	Missing – 0	brightness temperatures in M13 or M15 unavailable
	Scan – 1	obsolete
	Other – 2	obsolete
	Water – 3	pixel classified as water
	Cloud – 4	pixel classified as cloudy
	No Fire – 5	pixel classified as non fire
	Unknown – 6	pixel with no valid background pixels
	Fire Low – 7	fire pixel with confidence strictly less than 20%
	Fire Medium – 8	fire pixel with confidence between 20% and 80%
Fire High – 9	fire pixel with confidence greater or equal to 80 %	

### 2.1.2 Algorithm Processing

Inputs to the algorithm are measured VIIRS normalized reflectances, brightness temperatures, and ancillary data as well as algorithm threshold information.

#### 2.1.2.1 Main Module - ProEdrViirsActiveFires.cpp

This is the derived algorithm for the Active Fires algorithm and is a subclass of the ProCmnAlgorithm class. The class creates a list of input data items that are read from DMS and passes all of the required data into the algorithm itself. When the algorithm has finished processing the data, an output item is written to DMS that contains the fire mask.

#### 2.1.2.2 ProEdrViirsActiveFires::detect(...)

This is the main fire detection algorithm that wraps a modified version of MODIS Fire Mask code version 4. Initialize the inext and iprev arrays for each scan. Examine each pixel in the granule. If the pixel is in a bow-tie deletion region, or if either T13B or T15 data is missing, or if the pixel is classified water, or if pixel is cloudy, then skip to the next pixel in the scan direction. Non-water pixels containing valid data are counted as land. If the pixel was not classified as a potential fire, then skip to the next pixel. Choose the day or night thresholds depending on the day or night flag.

Next, compute the background statistics for all potential fire pixels. During the day compute the NDVI for all of the background pixels with  $R7 > 0$ . Use the NDVI to determine if any of these pixels are water pixels. If there are any background fires, compute statistics for the background fire pixels. If there are any valid background pixels, calculate the means MeanT13B, MeanT15, and MeanDT, and mean absolute deviations MadT13B, MadT15, and MadDT, for T13B, T15, and  $DT = T13B - T15$ . De-mean the T13B data and normalize it by the mean absolute deviation giving

$$z21 = (T13 - \text{MeanT13B}) / (\text{MadT13B} - \text{eps}).$$

These values are used to compute the contextual fire tests for the pixel:

$$\begin{aligned} \text{test2} &= DT > (\text{MeanDT} + \text{test2\_sigma} * \text{MadDT}), \\ \text{test3} &= DT > (\text{MeanDT} + \text{minbkg\_DT}), \\ \text{test4} &= T13B > (\text{MeanT13B} + \text{test4\_sigma} * \text{MadT13B}), \\ \text{test5} &= T15 > (\text{MeanT15} + \text{MadT15} - \text{devrp\_T15}), \text{ and} \\ \text{test6} &= \text{BkgFireMadT13B} > \text{test6\_sigma}. \end{aligned}$$

For the pixel compute the absolute fire test given by

$$\text{test1} = T13 > \text{thresholdT13}.$$

The values for `minbkg_DT`, `devrp_T15`, and `thresholdT13` are different for day and night.

If there are valid background pixels then use both absolute and contextual fire tests. For these tests, a fire is detected during the day if `test1` is true or if `test2`, `test3`, and `test4` are all true and `test5` or `test6` is true. At night a fire is detected if `test1` is true or if `test2`, `test3`, and `test4` are all true. If there are no valid background pixels, use only the absolute fire test; the pixel is a fire pixel if `test1` is true. If no fire is detected and there are valid background pixels, then set the fire mask to "no fire" otherwise set the fire mask to "unknown".

Test the declared fire pixels for false alarms. If the sun glint is large or if it is moderate glint and the pixel is near water pixels, then reject the pixel and set the fire mask to "no fire". Override detection if it is likely that this is a false alarm caused by excessive rejection of legitimate background pixels. During the day, if the absolute fire test is not true, the fraction of valid background pixels, given by `nvalid / nvalid_land`, is less than the threshold `bkgoverride_fvalid`, the number of background fires is greater than the threshold `bkgoverride_nbfire`, `BkgFireMeanT13B` is less than the threshold `bkgoverride_MeanT13B`, `BkgFireMadT13B` is less than the threshold `bkgoverride_MadT13B`, the band 7 normalized reflectances greater than `bkgoverride_R7`, and `T13B` is less than  $(\text{BkgFireMeanT13B} + \text{bkgoverride\_sigmaT13B} * \text{BkgFireMadT13B})$  then the fire is rejected and the fire mask for the pixel is set to "no fire". Also during the day, if the absolute fire test is not true and there are water pixels in the background, then reject the fire as a false alarm and set the fire mask for the pixel to "no fire". If a false alarm is detected, skip to the next pixel. Compute the fire confidence and use it to set the fire mask confidence level.

### 2.1.2.3 ProEdrViirsActiveFires::prescreen(...)

This is a wrapper around modified MODIS Fire Mask Version 4 code designed to detect potential fire pixels. The routine loops over each pixel in the granule. If the solar zenith angle is  $< 85^\circ$ , then it is day and check for sun glint. Calculate the relative azimuth angle between the sun and satellite directions and calculate the glint level by invoking the method `sunGlint(...)`. The land-water mask is checked to see if the pixel is over land. For the MOD03 land mask, treat "land" and "ephemeral water" as land. If the pixel is water, then skip to the next pixel. Next check if the pixel is cloudy. Use the internal cloud test if `T16` is greater than zero by invoking the method `iscloud(R5, R7, T16)`. If the internal tests mark the pixel as cloudy, skip to the next pixel. Different thresholds are used for day or night. The difference between the `M13` and `M15` brightness temperatures are given by  $DT = T13 - T15$ . If  $T13 > T13\text{threshold}$ ,  $DT > D\text{tthreshold}$ , and  $\text{Test3} = R7 < R7\text{threshold}$ , then mark the pixel as a potential fire. Next perform the background pixel tests. If  $T13 > T13\text{backgroundThreshold}$  and  $DT > D\text{tbackgroundThreshold}$ , then mark the pixel as a potential background fire otherwise mark it as a valid background pixel.

### 2.1.2.4 ProEdrViirsActiveFires::bkgPixels(...)

This is a wrapper around modified MODIS Fire Mask Version 4 code designed to estimate background by searching the neighboring area. The search for valid background pixels is made by placing a window around the possible fire pixel. The initial window size starts as a 3 x 3 ring. The number of valid background pixels in the window, `nvalid`, is then retrieved by a call to the `getValidBkgPixels(...)` method. The minimum number of background pixels required in the search window is given by

$$\text{mininvalid} = \text{Valid\_Win\_Ratio} (\text{winsize}^2 - \text{Win\_Exclude\_Size})$$

where Valid\_Win\_Ratio is the minimum fraction of valid pixels in the window and Win\_Exclude\_Size is the number of excluded pixels in the window. If mininvalid is less than the minimum number of valid pixels, Valid\_Win\_Size, then set it equal to Valid\_Win\_Size. If nvalid is greater than mininvalid, then return nvalid, otherwise increase the size of the window by 2 pixels on a side and try again. If the window is larger than the maximum window size then return nvalid = 0.

#### 2.1.2.5 ProEdrViirsActiveFires::getValidBkgPixels(...)

This is a wrapper around modified MODIS Fire Mask Version 4 code designed to get background by searching the neighboring area. Since the background search starts with a 3 x 3 window or  $r = 1$ , as it is called with larger values of  $r$ , only the outer edge has to be searched each time. The routine was modified to consider bow-tie deletion areas and cross-scan interleave. If the background search window extends past either end of the scan line then set it equal to the scan line. The possible fire pixel is located at  $(ic, jc)$ . The index of the scan for the current row,  $ic$ , is calculated. For the top edge of the window, set the cross-scan index to  $i = ic - r$ , where  $r$  is the "radius" of the window. If  $i < \text{top}[\text{scan}][jc]$  then look in the previous scan, handling bow-tie deletion. Examine pixels in the scan direction with  $jc - r \leq j \leq jc + r$ . The cross-scan index in the previous scan is given by

$$i += 1 - \text{top}[\text{scan}][jc] + \text{prev}[\text{scan}][j]$$

where  $\text{prev}[\text{scan}][j]$  is the nearest neighbor pixel in the previous scan. If pixel  $(i, j)$  is a valid background pixel then retrieve T13B and T15 from the data structure and store them in the appropriate buffers. Also store T13B – T15 in BuffDT and increment nvalid. If pixel  $(i, j)$  has  $R7 > 0$  then retrieve R5, R7, and R11 from the data structure, store them in the appropriate buffers, and increment nref. If pixel  $(i, j)$  is a background fire pixel then retrieve T13B and T15 from the data structure and store them in the appropriate buffers. Also store T13B – T15 in BkgFireBuffDT and increment nbfire. If pixel  $(i, j)$  is a water pixel then increment nwater. For the bottom edge of the window, set the cross scan index to  $i = ic + r$ . If  $i > \text{bottom}[\text{scan}][jc]$  then look in the next scan, handling bow-tie deletion. Again examine pixels in the scan direction with  $jc - r \leq j \leq jc + r$ . The cross-scan index in the next scan is given by

$$i = ic + r - \text{Bottom}[\text{scan}][jc] - 1 + \text{next}[\text{scan}][j]$$

where  $\text{next}[\text{scan}][j]$  is the nearest neighbor pixel in the next scan. Store the brightness temperatures and normalized reflectances as above, and increment the appropriate counters.

If doing 3 x 3 window, i.e.  $r = 1$ , skip pixels adjacent to the candidate fire pixel in the along-scan direction. The left edge of the window is given by  $jl = jc - r$ , while the right edge is given by  $jr = jc + r$ . For the left side, search in cross-scan with  $ic - r + 1 \leq i < ic + r$ . The value of the row index,  $icorr$ , is computed to look in the appropriate previous, next or current scan. For pixel  $(icorr, jl)$  store the brightness temperatures and normalized reflectances as was done for the top edge, and increment the appropriate counters. Treat the right side as the left, and retrieve the data for pixel  $(icorr, jr)$  and add it to the buffers, incrementing the appropriate counters.

#### 2.1.2.6 ProEdrViirsActiveFires::countAdjacentPixels(...)

This method is a Wrapper around modified MODIS code. It counts the number of cloud and water pixels in the eight adjacent pixels to the target pixel given by  $(ic, jc)$ . If it is the bottom or

top pixel in the cross-scan direction, including the effects of bow-tie deletion, the nearest neighbor pixels are taken from the previous or next scan. The water and cloud flags of each adjacent pixel are examined and the total number of pixels marked as water is returned.

### 2.1.2.7 ProEdrViirsActiveFires::computeStats(...)

This is the method to compute mean and mean absolute deviation of input data in an arbitrary input array x containing n values. The mean is given by

$$\text{mean} = \frac{1}{n} \sum_{i=0}^{n-1} x_i .$$

The mean absolute deviation of array x is given by

$$\text{mad} = \frac{1}{n} \sum_{i=0}^{n-1} |x_i - \text{mean}| .$$

### 2.1.2.8 ProEdrViirsActiveFires::sunGlint(...)

This method is a wrapper around original MODIS code to test for sun glint. The glint angle is given by

$$\cos(\text{GlintAng}) = \cos(\text{view zenith angle}) \cos(\text{solar zenith angle}) - \sin(\text{view zenith angle}) \sin(\text{solar zenith angle}) \cos(\text{relative azimuth angle}).$$

For very small glint angles automatically assume that there is glint. The level of the glint is set by tests based on the glint angle and the normalized reflectances R5, R7, and R11. The program returns the glint level.

### 2.1.2.9 ProEdrViirsActiveFires::fixang(...)

This is the method for converting angles from  $-2\pi \leq \text{ang} \leq 2\pi$  to  $-\pi \leq \text{ang} \leq \pi$ . If  $\text{ang} > \pi$ , then return  $\text{ang} - 2\pi$  or if  $\text{ang} \leq -\pi$  then return  $\text{ang} + 2\pi$  otherwise, return the input value of  $\text{ang}$ .

### 2.1.2.10 ProEdrViirsActiveFires::confidence(...)

This method is a wrapper around the MODIS confidence test routine. It produces fire detection confidence levels. First, the method calculates the normalized, de-measured difference in T13 – T15, zDT. This value is given by

$$zDT = \frac{DT - \text{MeanDT}}{\text{MadDT} + \text{eps}} .$$

Next the S ratio function is used to calculate two individual confidence tests given by  $C2 = S(z21, 3, 6)$  and  $C3 = S(zDT, 3.5, 6)$ . During the day, calculate three more individual confidence tests given by

$$\begin{aligned} C1 &= S(T13B, 310, 340), \\ C4 &= 1 - S(\text{AdjCloud}, 0, 6), \text{ and} \\ C5 &= 1 - S(\text{AdjWater}, 0, 6). \end{aligned}$$

The confidence is then given by taking the geometric mean of the results of the five tests:

$$C = \sqrt[5]{C1 \cdot C2 \cdot C3 \cdot C4 \cdot C5} .$$

At night, calculate another individual confidence test given by  $C1 = S(T13B, 305, 320)$ . The confidence is then given by taking the geometric mean of the results of the three tests:

$$C = \sqrt[3]{C1 \cdot C2 \cdot C3} .$$

The confidence results are then converted to percent and returned by the routine.

#### **2.1.2.11 ProEdrViirsActiveFires::S(...)**

This is the method to compute the ratio S. The procedure is derived from original MODIS code. If  $x \leq a$ , then return 0; if  $x \geq b$  return 1; otherwise, return  $(x - a) / (b - a)$ .

#### **2.1.2.12 ProEdrViirsActiveFires::computeNDVI(...)**

This is the method derived from original MODIS code to compute the NDVI ratio for n pixels. The routine calculates the NDVI for each of the n pixels where the NDVI is given by

$$NDVI = (R7 - R5) / (R7 + R5).$$

#### **2.1.2.13 ProEdrViirsActiveFires::bkgWaterPix(...)**

This is the method derived from original MODIS code to determine if water is present in a region. Given R7, R11, and NDVI then a pixel is considered water if  $R7 < \text{bkgwater\_R7}$  and  $R11 < \text{bkgwater\_R11}$  and  $NDVI < \text{bkgwater\_NDVI}$ . For n input pixel values the total number of pixels, nwater, that pass the test is returned. The values of bkgwater\_R7, bkgwater\_R11, and bkgwater\_NDVI are read from the thresholds data item.

#### **2.1.2.14 ProEdrViirsActiveFires::iscloud(...)**

This is the method to test a pixel for presence of clouds. There are four tests performed using R5, R7, and T16. If  $(R5 + R7) > \text{iscloud\_test1}$ , or  $T16 < \text{iscloud\_test2}$ , or  $(R5 + R7) > \text{iscloud\_test3}$  and  $T16 < \text{iscloud\_test4}$  then the pixel is declared to be cloudy. The values of iscloud\_test1, iscloud\_test2, iscloud\_test3, and iscloud\_test4 are set during initialization.

### **2.1.3 Graceful Degradation**

#### **2.1.3.1 Graceful Degradation Inputs**

There is one case where input graceful degradation is indicated in the Active Fires EDR.

1. An input retrieved for the algorithm had its N\_Graceful\_Degradation metadata field set to YES (propagation).

**Table 5. Graceful Degradation**

<b>Input Data Description</b>	<b>Baseline Data Source</b>	<b>Primary Backup Data Source</b>	<b>Secondary Backup Data Source</b>	<b>Tertiary Backup Data Source</b>	<b>Graceful Degradation Done Upstream</b>
Quarterly Surface Type GridIP	VIIRS_GD_08.4.3 VIIRS	N/A	N/A	N/A	N/A
Land-Water Mask	VIIRS_GD_27.4.1 MODIS	N/A	N/A	N/A	N/A

**2.1.3.2 Graceful Degradation Processing**

None.

**2.1.3.3 Graceful Degradation Outputs**

None.

**2.1.4 Exception Handling**

Any exceptions or errors are reported to IDPS using the appropriate INF API. All input is assumed to be available until the graceful degradation plan has been implemented.

- The software checks for bad or missing pixels (denoted by a fill value) and missing ancillary data. It does not perform a retrieval in such cases.

**2.1.5 Data Quality Monitoring**

Each algorithm uses specific criteria contained in a Data Quality Threshold Table (DQTT) to determine when a Data Quality Notification (DQN) is produced. The DQTT contains the threshold used to trigger the DQN as well as the text contained in the DQN. If a threshold is met, the algorithm stores a DQN in DMS indicating the test(s) that failed and the value of the DQN attribute. Refer to 474-00448-02-01\_JPSS-DD-Vol-II-Part-1 for more information on Data Quality Notifications.

**2.1.6 Computational Precision Requirements**

The current implementation of the Active Fire algorithm performs computations using 32-bit floating-point precision values. The SDR geolocation information is passed through and no change of precision occurs in the science code.

**2.1.7 Algorithm Support Considerations**

No specific software environment considerations are required.

**2.1.8 Assumptions and Limitations**

**2.1.8.1 Assumptions**

Overlapping pixels deleted from the down linked data stream are assumed to be replaced with fill values during SDR processing.

### **2.1.8.2 Limitations**

None identified at this time.

### 3.0 GLOSSARY/ACRONYM LIST

#### 3.1 Glossary

Table 6 contains terms most applicable for this OAD.

**Table 6. Glossary**

Term	Description
Algorithm	A formula or set of steps for solving a particular problem. Algorithms can be expressed in any language, from natural languages like English to mathematical expressions to programming languages like FORTRAN. On JPSS, an algorithm consists of: <ol style="list-style-type: none"> <li>1. A theoretical description (i.e., science/mathematical basis)</li> <li>2. A computer implementation description (i.e., method of solution)</li> <li>3. A computer implementation (i.e., code)</li> </ol>
Algorithm Engineering Review Board (AERB)	Interdisciplinary board of scientific and engineering personnel responsible for the approval and disposition of algorithm acceptance, verification, development and testing transitions. Chaired by the Data Process Algorithm Lead, members include representatives from STAR, DPES, IDPS, and Raytheon.
Algorithm Verification	Science-grade software delivered by an algorithm provider is verified for compliance with data quality and timeliness requirements by Algorithm Team science personnel. This activity is nominally performed at the GRAVITE facility. Delivered code is executed on compatible GRAVITE computing platforms. Minor hosting modifications may be made to allow code execution. Optionally, verification may be performed at the Algorithm Provider's facility if warranted due to technical, schedule or cost considerations.
EDR Algorithm	Scientific description and corresponding software and test data necessary to produce one or more environmental data records. The scientific computational basis for the production of each data record is described in an ATBD. At a minimum, implemented software is science-grade and includes test data demonstrating data quality compliance.
Environmental Data Record (EDR)	<p><i>[IORD Definition]</i>                      Data record produced when an algorithm is used to convert Raw Data Records (RDRs) to geophysical parameters (including ancillary parameters, e.g., cloud clear radiation, etc.).</p> <p><i>[Supplementary Definition]</i>                      An Environmental Data Record (EDR) represents the state of the environment, and the related information needed to access and understand the record. Specifically, it is a set of related data items that describe one or more related estimated environmental parameters over a limited time-space range. The parameters are located by time and Earth coordinates. EDRs may have been resampled if they are created from multiple data sources with different sampling patterns. An EDR is created from one or more JPSSDRs or EDRs, plus ancillary environmental data provided by others. EDR metadata contains references to its processing history, spatial and temporal coverage, and quality.</p>
Model Validation	The process of determining the degree to which a model is an accurate representation of the real-world from the perspective of the intended uses of the model.
Model Verification	The process of determining that a model implementation accurately represents the developer's conceptual description and specifications.
Operational Code	Verified science-grade software, delivered by an algorithm provider and verified by GRAVITE, is developed into operational-grade code by the IDPS IPT.
Operational-Grade Software	Code that produces data records compliant with the System Specification requirements for data quality and IDPS timeliness and operational infrastructure. The software is modular relative to the IDPS infrastructure and compliant with IDPS application programming interfaces (APIs) as specified for TDR/SDR or EDR code.

Term	Description
Raw Data Record (RDR)	<p><i>[IORD Definition]</i>                      Full resolution digital sensor data, time referenced and earth located, with absolute radiometric and geometric calibration coefficients appended, but not applied, to the data. Aggregates (sums or weighted averages) of detector samples are considered to be full resolution data if the aggregation is normally performed to meet resolution and other requirements. Sensor data shall be unprocessed with the following exceptions: time delay and integration (TDI), detector array non-uniformity correction (i.e., offset and responsivity equalization), and data compression are allowed. Lossy data compression is allowed only if the total measurement error is dominated by error sources other than the data compression algorithm. All calibration data will be retained and communicated to the ground without Lossy compression.</p> <p><i>[Supplementary Definition]</i>                      A Raw Data Record (RDR) is a logical grouping of raw data output by a sensor, and related information needed to process the record into an SDR or TDR. Specifically, it is a set of unmodified raw data (mission and housekeeping) produced by a sensor suite, one sensor, or a reasonable subset of a sensor (e.g., channel or channel group), over a specified, limited time range. Along with the sensor data, the RDR includes auxiliary data from other portions of JPSS (space or ground) needed to recreate the sensor measurement, to correct the measurement for known distortions, and to locate the measurement in time and space, through subsequent processing. Metadata is associated with the sensor and auxiliary data to permit its effective use.</p>
Retrieval Algorithm	A science-based algorithm used to ‘retrieve’ a set of environmental/geophysical parameters (EDR) from calibrated and geolocated sensor data (SDR). Synonym for EDR processing.
Science Algorithm	The theoretical description and a corresponding software implementation needed to produce an NPP/JPSS data product (TDR, SDR or EDR). The former is described in an ATBD. The latter is typically developed for a research setting and characterized as “science-grade”.
Science Algorithm Provider	Organization responsible for development and/or delivery of TDR/SDR or EDR algorithms associated with a given sensor.
Science-Grade Software	Code that produces data records in accordance with the science algorithm data quality requirements. This code, typically, has no software requirements for implementation language, targeted operating system, modularity, input and output data format or any other design discipline or assumed infrastructure.
SDR/TDR Algorithm	Scientific description and corresponding software and test data necessary to produce a Temperature Data Record and/or Sensor Data Record given a sensor’s Raw Data Record. The scientific computational basis for the production of each data record is described in an Algorithm Theoretical Basis Document (ATBD). At a minimum, implemented software is science-grade and includes test data demonstrating data quality compliance.
Sensor Data Record (SDR)	<p><i>[IORD Definition]</i>                      Data record produced when an algorithm is used to convert Raw Data Records (RDRs) to calibrated brightness temperatures with associated ephemeris data. The existence of the SDRs provides reversible data tracking back from the EDRs to the Raw data.</p> <p><i>[Supplementary Definition]</i>                      A Sensor Data Record (SDR) is the recreated input to a sensor, and the related information needed to access and understand the record. Specifically, it is a set of incident flux estimates made by a sensor, over a limited time interval, with annotations that permit its effective use. The environmental flux estimates at the sensor aperture are corrected for sensor effects. The estimates are reported in physically meaningful units, usually in terms of an angular or spatial and temporal distribution at the sensor location, as a function of spectrum, polarization, or delay, and always at full resolution. When meaningful, the flux is also associated with the point on the Earth geoid from which it apparently originated. Also, when meaningful, the sensor flux is converted to an equivalent top-of-atmosphere (TOA) brightness. The associated metadata includes a record of the processing and sources from which the SDR was created, and other information needed to understand the data.</p>

Term	Description
Temperature Data Record (TDR)	<p><i>[IORD Definition]</i>                      Temperature Data Records (TDRs) are geolocated, antenna temperatures with all relevant calibration data counts and ephemeris data to revert from T-sub-a into counts.</p> <p><i>[Supplementary Definition]</i>                      A Temperature Data Record (TDR) is the brightness temperature value measured by a microwave sensor, and the related information needed to access and understand the record. Specifically, it is a set of the corrected radiometric measurements made by an imaging microwave sensor, over a limited time range, with annotation that permits its effective use. A TDR is a partially-processed variant of an SDR. Instead of reporting the estimated microwave flux from a specified direction, it reports the observed antenna brightness temperature in that direction.</p>

### 3.2 Acronyms

Table 7 contains terms most applicable for this OAD.

**Table 7. Acronyms**

Acronym	Description
AM&S	Algorithms, Models & Simulations
API	Application Programming Interfaces
DMS	Data Management Subsystem
DQTT	Data Quality Test Table
INF	Infrastructure
ING	Ingest
IP	Intermediate Product[CVP4]
LUT	Look-Up Table
MDFCB	Mission Data Format Control Book
QF	Quality Flag
SDR	Sensor Data Record
SI	International System of Units
TBD	To Be Determined
TBR	To Be Resolved
TOA	Top of the Atmosphere
VCM	VIIRS Cloud Mask
VFM	VIIRS Fire Mask

#### 4.0 OPEN ISSUES

**Table 8. TBXs**

TBX ID	Title/Description	Resolution Date
None		